


Circuit diagram

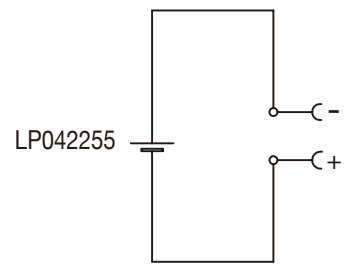

Specification

Lithium Polymer Battery Pack LP042255 21mAh 3.7V without Protection Circuit Module (PCM)
 This data sheet describes the requirements and properties of lithium polymer rechargeable battery pack manufactured by LiPol Battery Co., Ltd - China

Mechanical Characteristics

- Cell ▶ LP042255
- PCM ▶ No
- NTC ▶ No
- Configuration ▶ 1S1P
- Weight ▶ appr. 0.42g

Electrical Specification

- Rated Capacity ▶ 21mAh min, 21mAh typ.
- Nominal Voltage ▶ 3.7V
- Wat-Hour Rating ▶ 0.0777Wh
- Max. Operating Voltage Range ▶ 2.75V to 4.20V
- Max. Charge Voltage ▶ 4.2V ± 50mV
- Max. Charge Current ▶ 21mA
- Max. Continuous Discharge Current ▶ 21mA
- Discharge Cut Off ▶ 2.75V
- Internal Impedance ▶ <600mΩ
- Expected Cycle Life @ (0.5C/0.5C) @ 23±5°C ▶ 500 cycles ≥ 80%

Cell Protection

- Overcharge Detection ▶ 4.275 ±50mV (0.7 to 1.3sec. delay, release 4.275V ±50mV)
- Overdischarge Detection ▶ 2.75V ±50mV (14 to 26msec. delay, resume 2.50V ±50mV)
- Overcurrent Detection ▶ 100mA to 150mA (8 to 16msec. delay)

Ambient Conditions

- Charge Temp. Range ▶ 0 to +45°C
- Discharge Temp. Range ▶ -20 to +60°C
- Storage Temp. Range ▶ 1 year at -20 to +30°C >70%
- ▶ 3 months at -20 to +45°C >70%
- ▶ 1 month at -20 to +60°C >70%
- Humidity ▶ 65 ±20%RH

Environmental and Safety

Please follow LiPol Handling and Safety Precautions for Lithium Polymer Battery. This battery meets the requirements of Battery Directives, and the battery parts are IEC 62133 & RoHS-Compliant. For more safety precautions and performance standards, please go to www.lipolbattery.com/support.html

Mae in mm All dimensions in mm	Freimtoleranzen Generaltoleranzen	Date	Name	LiPol Battery	Index
Als Betriebsgeheimnis anvertraut, alle Rechte vorbehalten	up to 6 · 0,1 over 6 up to 30 · 0,2	Erst. / Orig 29.04.2021	Xie Qingfang		
Proprietary data, company confidential, all rights reserved.	over 30 up to 100 · 0,3 over 100 · 0,5	Gepr./check 29.04.2021	Guo Daxia		
		Benennung/ Designation LP042255		Zchnng. / Dwg. Nr. 3 FD_2255_04	
		Origin: support@lipolbattery.com		www.LiPolBattery.com	